

### Billi Home BCS with Multifunction Mixer Tap

The Home BCS is the latest iteration of multifunction filtered drinking water appliances from Billi. The intersection of genuine innovation and sustainable design, The Home BCS integrates Billi's renowned water-cooling and energy reclaim technologies into a single space-saving under bench control module. Billi's Home BCS is the ultimate inclusion to the modern home.

The Good Design Award winning integrated Multifunction Mixer Tap provides a sleek solution to dispensing filtered water with a touch sensitive interface, alongside domestic mains supplied by operating a standard flick mixer.



### Features



Multifunction Mixer Tap

Home BCS Under-Bench Units



### Finishes

Standard Finishes

Special Order Finishes



Add the relevant Finish Code to the Product code to complete your specification eg 925100GCH-LF

### Accessories



**990726** - Tubing extension kit for Sparkling unit - 2mtrs

### Product Specifications

Water Type	BCS
Dispenser	G - Multifunction Mixer Tap
Mixer Tapware	N/A
Product Code	925100G
Warranty	3 years manufacturers warranty
Under-Bench Dimensions	395mm(W) x 355mm (H) x 495mm (D)
Min / Max Dispenser Temp	6°C / 99°C
Power Plug	10 amp
Power Rating	1500W, 220-240V, 50-60Hz
Water Pressure	Min. 250kPa
Ecolabel	N/A
EPD	N/A
Greenstar Contribution	N/A
Watermark License	WM-021525 (unit), WM-021914 (tap)
Lead Free	✓
Section J7.7 (NCC)	✓
WELS	5 Star - T42988
WELL	Cornerstone Membership
Management Systems	Every Billi drinking water appliance is manufactured under the strictest standards and is certified in accordance with: ISO9001 for QMS (FS 790754), ISO14001 for EMS (EMS 801468) and ISO45001 for OSHS (OHS 801469).
Food Handling	N/A
Filtration	994052 - 0.2 Micron supplied standard

Scan the QR code access our Revit families on **bimstore**



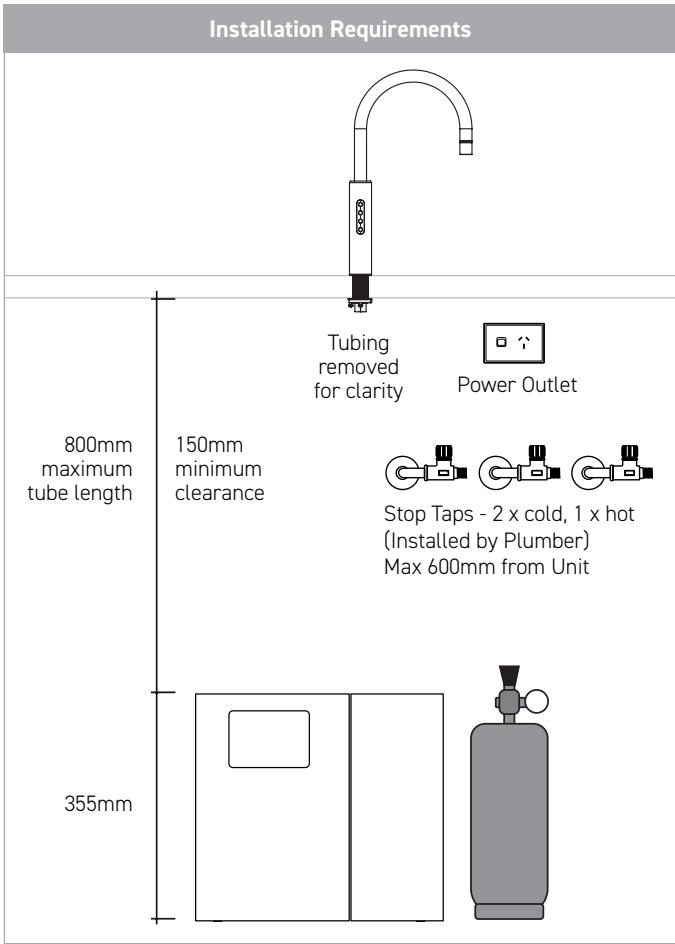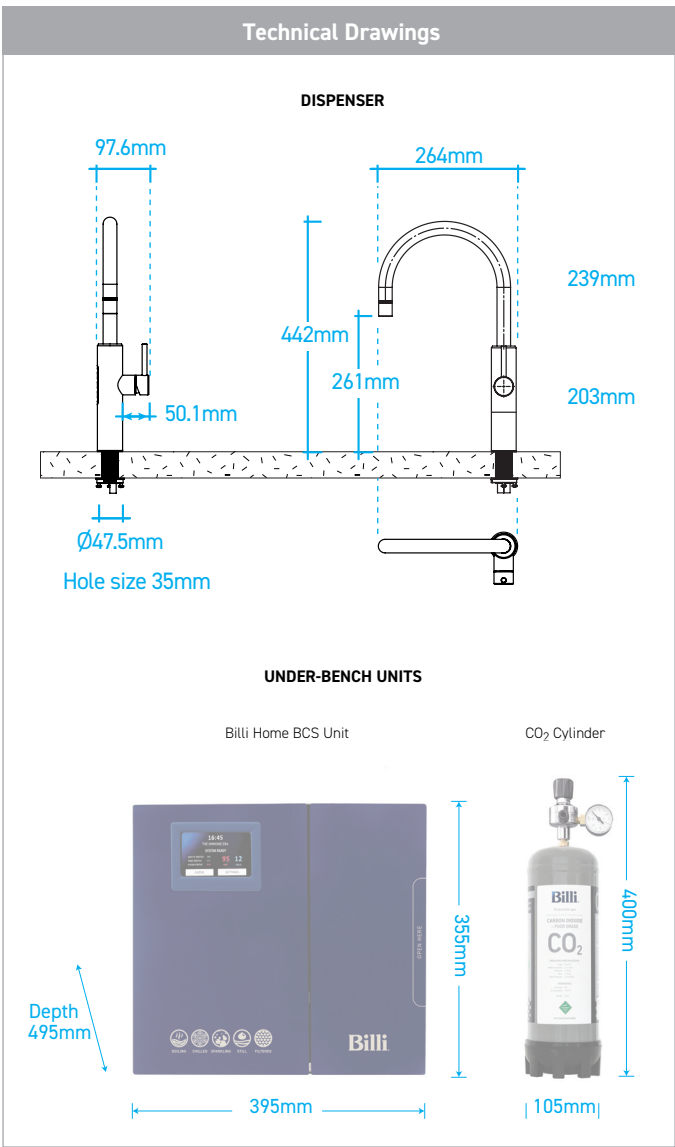

- ### Installation Notes
- Electrical** A standard 10 amp power outlet is required, located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.
  - Water** 1 x 1/2" BSP (15mm) cold stop tap required for unit supply and 1 x 1/2" BSP hot stop tap and 1 x 1/2" BSP cold stop tap required for mixer connection with male threads and it should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.
  - Pressure Valve** Integrated 500kPa pressure limiting and dual check valve is pre-installed to the unit inlet.
  - CO<sub>2</sub> MSDS** The CO<sub>2</sub> gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO<sub>2</sub> and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on [www.billi.com.au](http://www.billi.com.au) for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO<sub>2</sub> Cylinder - single 996911 or double 996912.
  - Stone Benches** Billi has a no-cut policy regarding all stone benches in compliance with regulations. The safety of our team and customers remains Billi's top priority.
  - Ventilation** No joinery ventilation or accessories are required for this Billi product (water cooled technology and/or no waste heat).

### Filtration – Most Recommended Replacement Filters

Billi range of premium filters utilize BWT's unique FibronX® technology, providing superior taste, water quality, filter life longevity and peace of mind when it comes to hygiene.

**994052 - (0.2 micron)**

Supplied standard. Residential or Critical Care sites.

**994051 - (5.0 micron)**

Commercial & high volume sites.

\*Drawings are for guidance during Specification, refer to Installation requirements for final install. All efforts are made to ensure Compliance & Certifications claims are current, however this is subject to change without notice. Billi assumes no liability or responsibility for out of date information.



Technical support

Book a service call

Filtration & Service

Warranty registration

Please scan the QR code for all support information.

**Billi Australia Pty Ltd**  
**P** 1800 812 321  
**W** [www.billi.com.au](http://www.billi.com.au)

**Billi New Zealand Ltd**  
**P** 0800 636 0 636  
**W** [www.billi.co.nz](http://www.billi.co.nz)

# Billi®